RR5-MAX PRO & RR5 FT
SET-UP SHEET

www.MCDRACING.com

MCD Racing

NAME:

RACE: DATE: ...../...../.....

TRACK

SIZE:	OPEN ☐	MEDIUM ☐	TIGHT ☐
TRACTION:	HIGH ☐	MEDIUM ☐	LOW ☐
SURFACE:	SMOOTH ☐	MEDIUM ☐	BUMPY ☐
TYPE:	HARD PACKED ☐	SOFT DIRT ☐	CLAY ☐
	BLUE GROOVE ☐	ASTRO TURF ☐	GRASS ☐
CONDITION:	DRY ☐	DUSTY ☐	WET ☐ MUD ☐
TEMPRATURE:	AIR:	TRACK:	

DIFFERENTIALS

FRONT			CENTER			REAR		
LSD ☐	OPEN ☐	PLNT ☐	LSD ☐	PLNT ☐	SOLID ☐	LSD ☐	OPEN ☐	PLNT ☐
LSD Ramp			LSD Ramp			LSD Ramp		
60° ☐	90° ☐	120° ☐	60° ☐	90° ☐	120° ☐	60° ☐	90° ☐	120° ☐

SHOCK SPRINGS

FRONT		REAR
☐	SOFT	☐
☐	MEDIUM	☐
☐	HARD	☐
	OTHER	

OIL VISCOSITY

FRONT | REAR

PISTON HOLE SIZES

FRONT: 2x2mm ☐ ☐ 4x2mm ☐ ☐ / 3x2mm ☐ ☐ 5x2mm ☐ ☐

REAR: 2x2mm ☐ ☐ 4x2mm ☐ ☐ / 3x2mm ☐ ☐ 5x2mm ☐ ☐

ACKERMAN

☐ LESS ☐ STANDARD

ANTI-ROLL BAR

FRONT ☐ THICKNESS ☐ REAR

CHASSIS | BODY

LONG ☐ SHORT ☐

NOTES

www.mcdracing.com/support

POSITION: **BEST LAP:**

FRONT

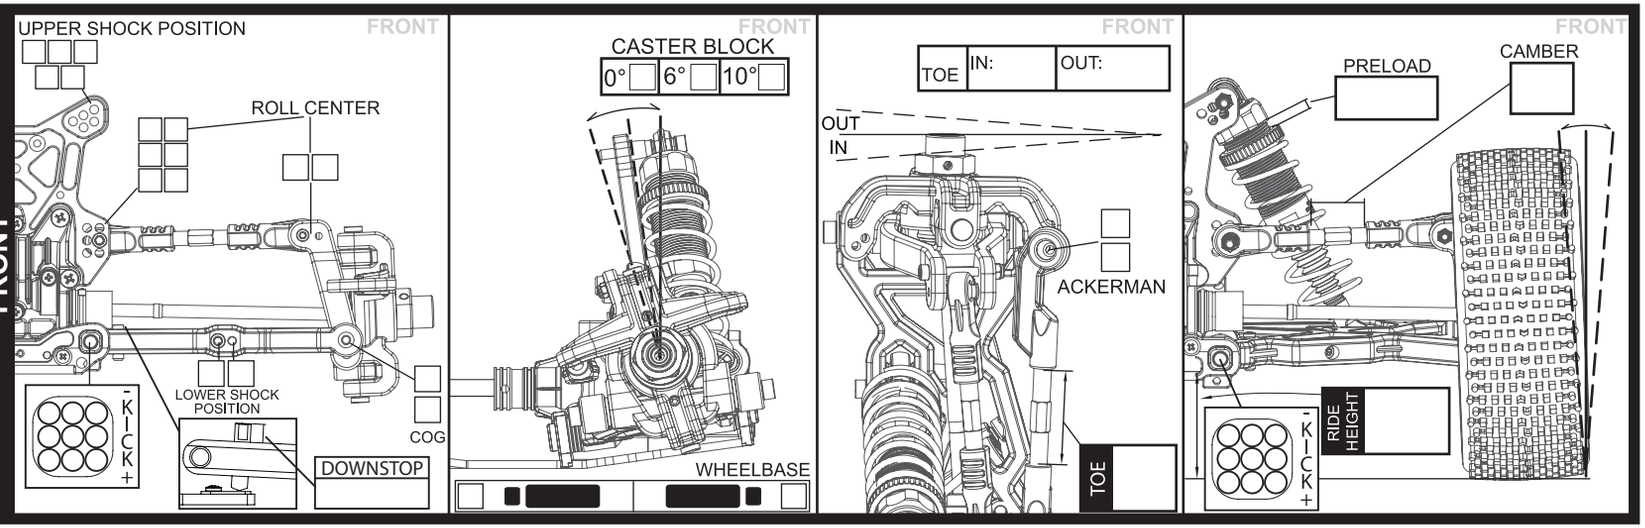

REAR

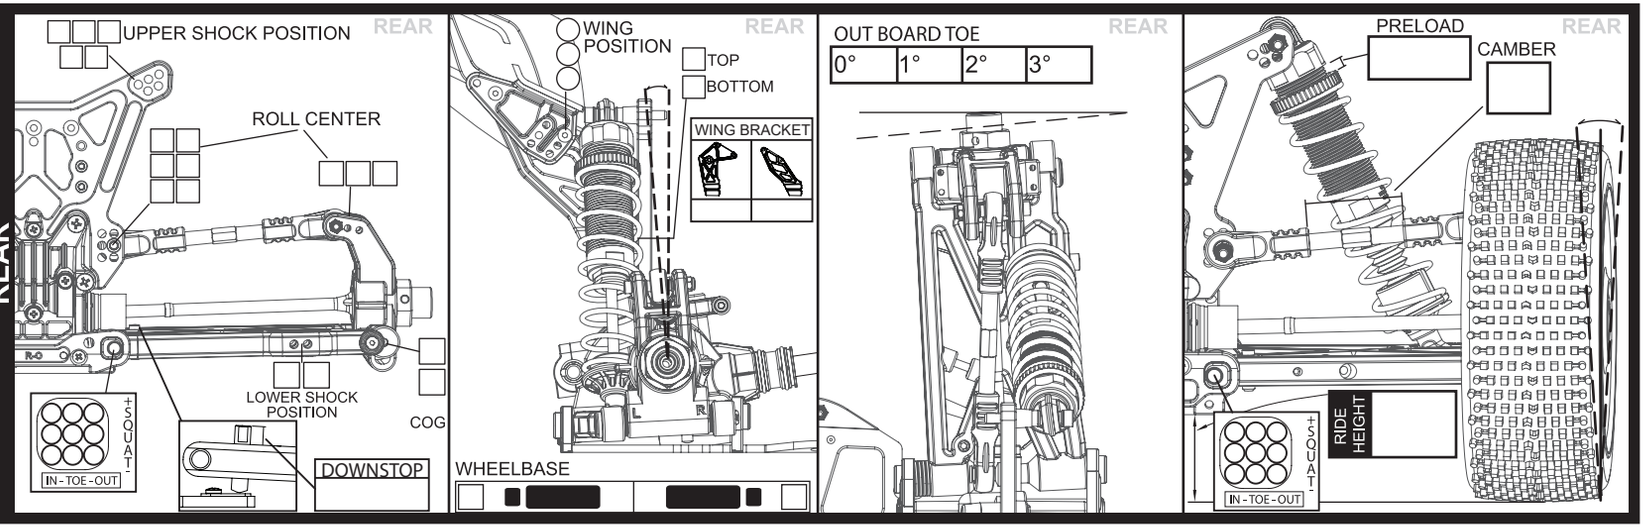

TYRES

	F	R
Micro-Stud	☐	☐
Block-Stud	☐	☐
Micro-Stud	☐	☐
Astro-Grip	☐	☐
Dirt-Max	☐	☐
Astro-Max	☐	☐

OTHER:

COMPOUND F ☐ R ☐

INSERT F ☐ R ☐

POWER UNIT

ENGINE:

CARBURATOR:

H L

PLUG:

OIL:

CLUTCH:

PIPE:

TRANSMISSION RATIO

Center Diff	Engine	Final Ratio
60	26	6,92
60	25	7,20
62	25	7,44
60	24	7,50
62	24	7,75
60	23	7,83
63	24	7,88
62	23	8,09
60	22	8,18
63	23	8,22
64	23	8,35
62	22	8,45
63	22	8,59
64	22	8,73
62	21	8,86
65	22	8,86
63	21	9,00
64	21	9,14
65	21	9,29
62	20	9,30
63	20	9,45
64	20	9,60
65	20	9,75
63	19	9,95
64	19	10,11